

# Water Pump Compact

Manufacturers Information | PN1226



## Material Specifications

<b>Pump</b>	Stainless Steel
<b>Handle</b>	Cast Aluminium
<b>Reservoir</b>	Stainless Steel
<b>Pump Pick Up</b>	PVC
<b>Fixing</b>	Stainless Steel
<b>Bearings</b>	Bronze

## Equipment Specifications

<b>Free Height of Fall</b>	Not required
<b>Fall Zone Size</b>	Not required
<b>Activity Space Recomm.</b>	Allow 1m around equipment
<b>Highest Point</b>	Handle 930mm

## Other Required Information

Can be connected to mains water or gravity fed from a water tank provided there is sufficient pressure.

Connection point is to the reservoir to a 15mm threaded plumbing fitting.

<b>Spare Parts</b>	Available to order
<b>Heaviest Part</b>	21 - 40kg Two Person Lift


## Standards

AS 4685 2021 Series

## Applications

<b>Age Group</b>	3 years +
<b>Supervision Level</b>	Young children should be supervised and inappropriate activities discouraged
<b>Playspaces</b>	Public parks, schools, early childhood centres commercial play areas
<b>Environment</b>	Shade preferred for user comfort and protection. Salt air environments may reduce life of steel.
<b>Vandalism Resistance</b>	Low susceptibility

## Product Dimensions

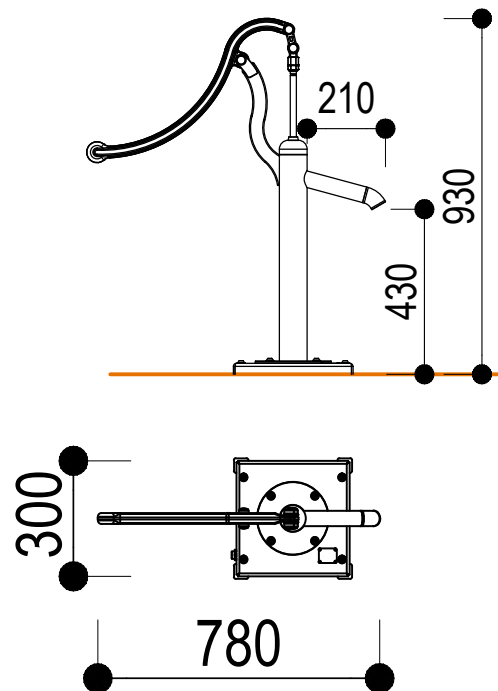

# Water Pump Compact

Manufacturers Information | PN1226

## Installation


### Footing quantities and depths

From ground level

Item	Qty	Hole Diameter	Hole Depth
Pump	1	500mm	250mm

### Note:

This product is designed for 50mm softfall. Check the proposed on site softfall depth. If it is not 50mm please adjust depths of post holes accordingly, to achieve correct overall subsurface depth. This will maintain correct height of equipment above undersurface level.

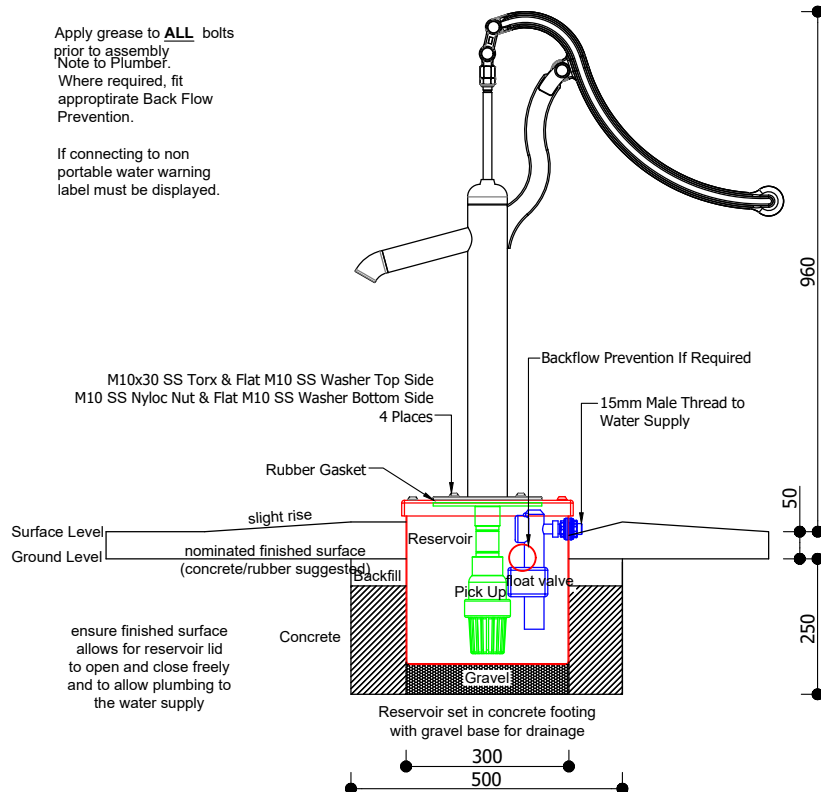

## Inspection Notes

All inspections and maintenance to be carried out by competent people with the appropriate knowledge, experience and authority.

### Inspection Frequencies

These are a guide only - local risk factors such as heavy usage, nearness to coast, and vandalism patterns need to be taken into account.

#### Routine Visual Inspection - Daily

Check for breakages, loose fittings and debris. Where safety issues are identified, quarantine until repaired.

#### Operational Inspection - Quarterly

RVI plus:-  
Check for wear in moving parts e.g. bearings, chains and links.  
Check security of fixings.

#### Comprehensive Inspection - Annually

OI plus :-  
Check for structural rigidity and degradation e.g. corrosion, decay etc.  
Where possible, remove undersurfacing to examine condition of supports and footings.

## Maintenance

In areas of high exposure to sun, wind and rain more frequent treatments may be necessary.

Note: Ensure all replacement parts conform with manufacturers original specifications

Note: In heavy use environment, more frequent inspection regime recommended

Note: Quarantine equipment during installation, inspection & maintenance